



REV.	DESCRIPTION	DATE
A		04-2013

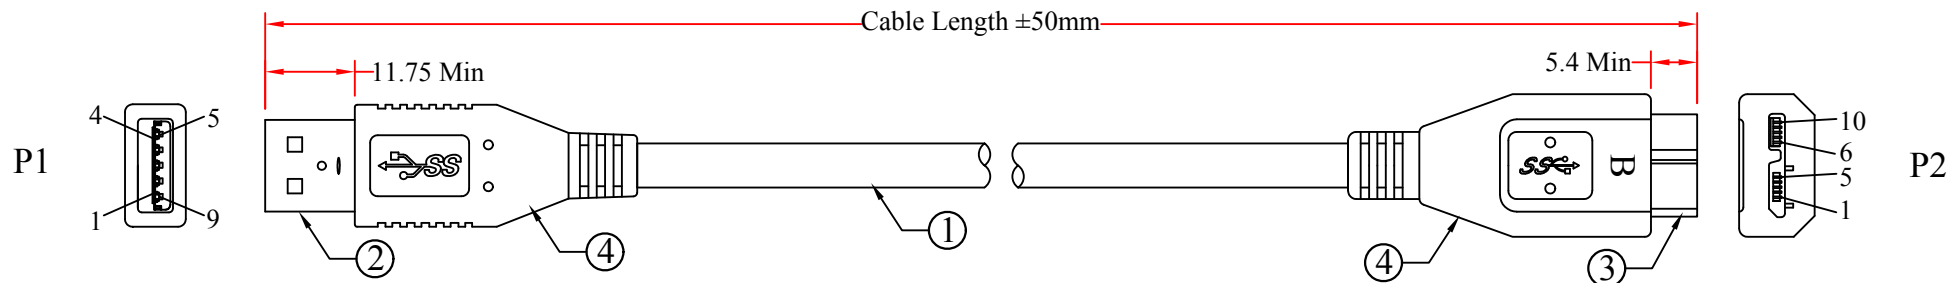

Pin Assignment

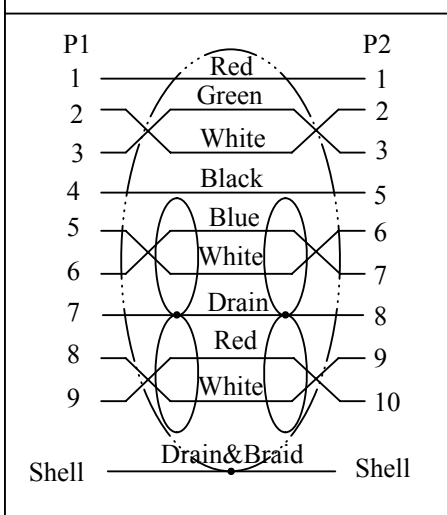



RoHS

### NOTES:

- 1.Electrical Test:  
(1)100% Open Short & Miswire Test.  
(2) Insulation Resistance 1 MΩ MIN.

PART NO.	CABLE LENGTH
10U3-03103	3 FT
10U3-03106	6 FT
10U3-03110	10 FT

4	Blue Molded PVC
3	USB 3.0 Micro Type B Male, Insulation Black, Contact Gold Flash, Shell Nickel Plated
2	USB 3.0 Type A Male, Insulation Blue, Contact Gold Flash, Shell Nickel Plated
1	UL2725(28AWG*1P+D+AL+Mylar)*2C+28AWG*1P+2C*24AWG+AL-Foil+Drain(7/0.12BC)+Braid(80/0.12ALMG),PVC(Low Lead, Low Cad), Color: Blue, Jacket OD: 5.5±0.2mm
NO.	SPECIFICATIONS
BOM LIST	

ITEM NUMBER	10U3-031xx			DRAWER	JL
TITLE	Micro USB 3.0 Cable, Blue, Type A Male to Micro-B Male			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	INCH		
DRAWING NO:				